



CONSOLIDATED BRASS CB IDEAL TAPWARE

Proudly manufactured in Australia since 1979

Flick Mixer Installation Instructions

If you have any questions regarding these instructions please contact our office.

Our website is always the most up to date source of information:

www.cbideal.com.au

CB Ideal Tapware Pty Ltd

Phone: +61 (08) 8276 6766

Fax: +61 (08) 8276 6623

Email: sales@cbideal.com.au

Factory and Head Office

1a Deloraine Road, Edwardstown, South Australia, 5039


ABN 98 156 625 035

ACN 156 625 035


WELS License 0091

Step 1) The hole in bench requirement is 32mm in diameter.

Step 2) Place flick mixer base and tail into hole.

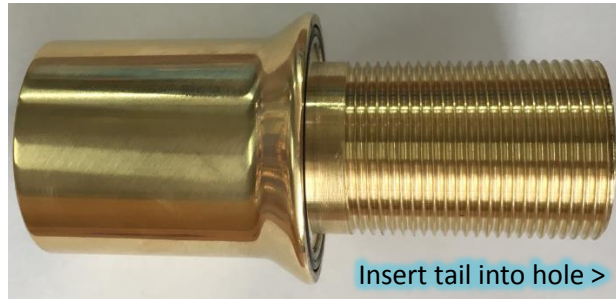

Step 3) Screw on lock nut and washer under the bench. Nip tight to hold but leave loose enough to allow adjustment in orientation of the base later.


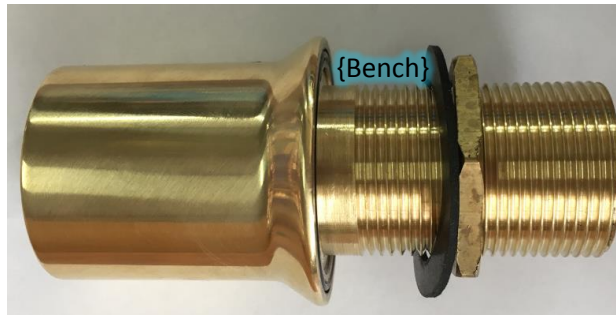


Step 4) Push up first flexible hose up through the bench (through the flick mixer base fitting).


Screw in first flexible hose to flick mixer body. The cold hose matches the side of the cold indicator. (see photo).

Push up the second flexible hose up through the bench (through the flick mixer base fitting).


Screw in the second flexible hose to flick mixer body. The hot hose matches the side of the hot indicator.

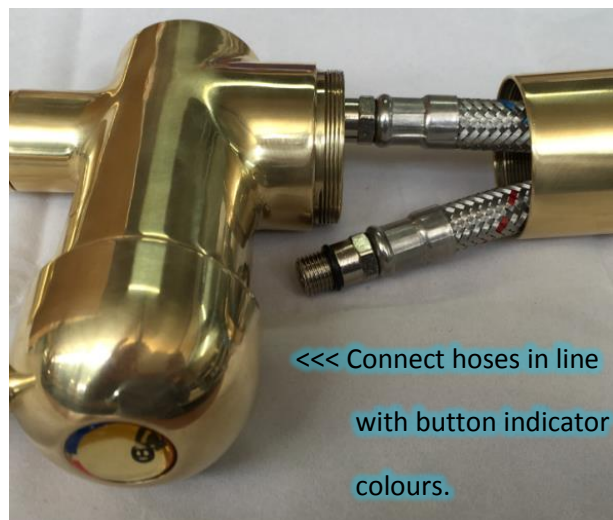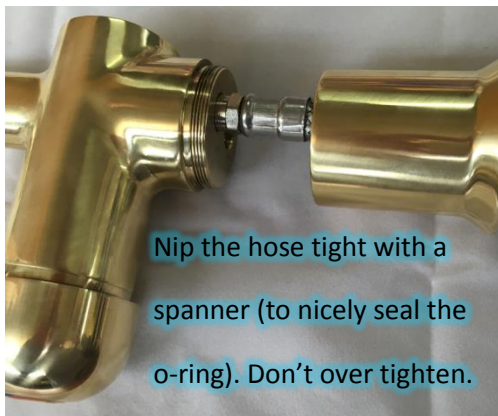

Step 5) Screw on top assembly of flick mixer until tight by hand.

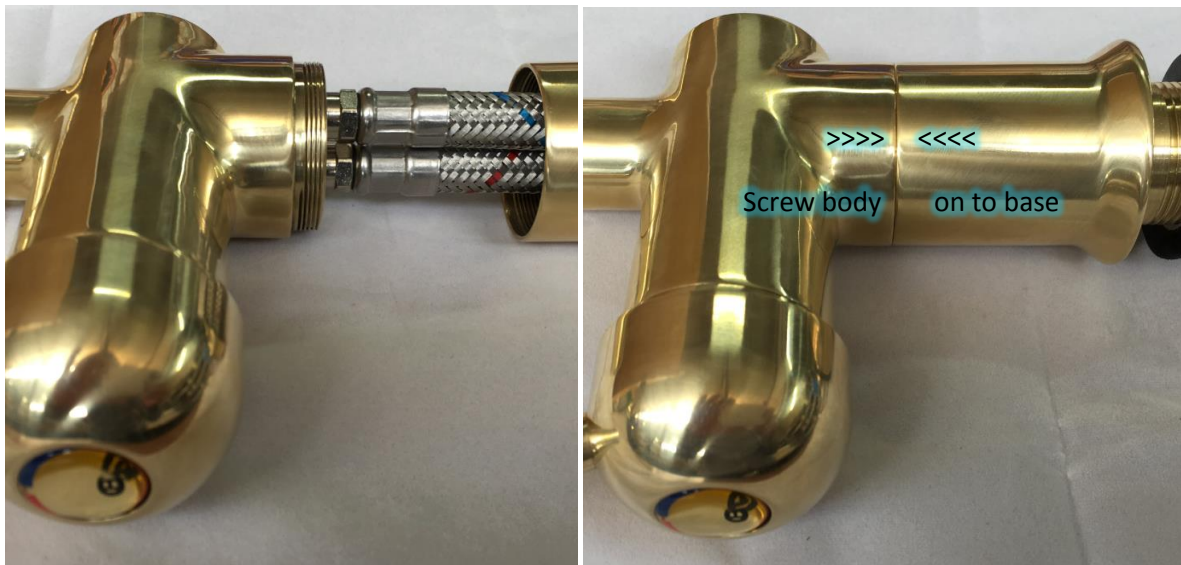


Step 6) Tighten under bench lock nut once happy with the orientation of the flick mixer body.

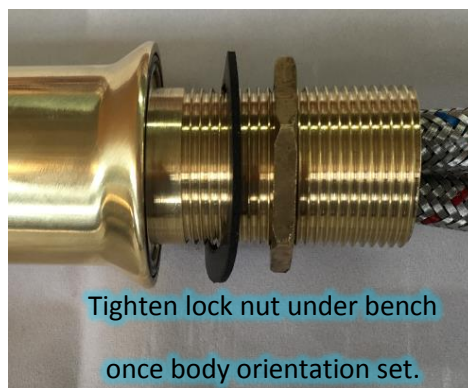

Step 7) Insert outlet and screw in grub screw using provided Allen Key.

Tighten to suit desired swivel movement. You can tighten further to make the outlet fixed in position.

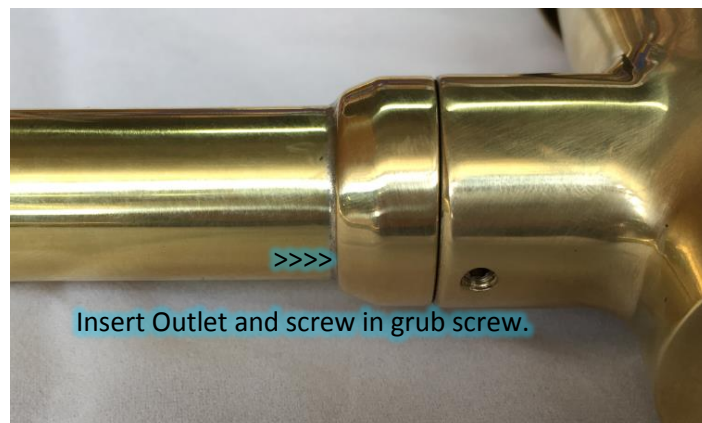

Step 8) Connect flexible hoses to water point.